



XYG-GH 系列 焊接接头

XYG-GH Welding fitting

SINYA



目 录

CONTENT

- | | | | | | | | |
|---|----|---|---|---|----|---|---|
|  | 04 |  | -GH6-TCHF型承插焊直通
SW Straight Coupling |  | 10 |  | -GH4-PCHF型承插焊四通
SW Cross |
|  | 04 |  | -GH6R-TCHF型承插焊异径直通
SW Reducer |  | 11 |  | -GHC-PCHF型承插焊半管接头
SW Half Union |
|  | 05 |  | -GH9-TCHF型承插焊弯通
SW Elbow |  | 11 |  | -GHP-PCHF型承插焊管帽
SW Cap |
|  | 05 |  | -GH5-TCHF型承插焊45° 弯通
SW45° Elbow |  | 11 |  | -GHU-PCHF型承插焊活接头
SW Union |
|  | 06 |  | -GH3-TCHF型承插焊三通
SW Tee |  | 12 |  | -GHU-TCH型对焊活接头
BW Union |
|  | 06 |  | -GH4-TCHF型承插焊四通
SW Cross |  | 12 |  | -GH6R-TCH型对焊异径直通
BW Reducer |
|  | 07 |  | -GH1-TCHF型承插焊外螺纹直通
SW Male Straight Coupling |  | 12 |  | -GH5-TCH型对焊45° 弯通
BW 45° Elbow |
|  | 07 |  | -GH7-TCHF型承插焊内螺纹直通
SW Female Straight Coupling |  | 13 |  | -GH9-TCH型对焊弯通
BW Elbow |
|  | 08 |  | -GH2-TCHF型承插焊外螺纹弯通
SW Male Elbow |  | 13 |  | -GH3-TCH型对焊三通
BW Tee |
|  | 08 |  | -GH8-TCHF型承插焊内螺纹弯通
SW Female Elbow |  | 13 |  | -GH4-TCH型对焊四通
BW Cross |
|  | 08 |  | -GH6-PCHF型承插焊直通
SW Straight Coupling |  | 14 |  | -GH1-TCH型对焊外螺纹直通
BW Male Straight Coupling |
|  | 09 |  | -GH6R-PCHF型承插焊异径直通
SW Reducer |  | 14 |  | -GH7-TCH型对焊内螺纹直通
BW Female Straight Coupling |
|  | 09 |  | -GH9-PCHF型承插焊弯通
SW Elbow |  | 15 |  | -GH3-TCH型对焊高压三通
BW Pressed Tee |
|  | 10 |  | -GH5-PCHF型承插焊45° 弯通
SW 45° Elbow |  | 15 |  | -GH-WDT型对焊接管台
BW Boss |
|  | 10 |  | -GH3-PCHF型承插焊三通
SW Tee |  | 15 |  | -GH-TDT型对焊内螺纹接管台
BW Boss to Female |
| | | | |  | 15 |  | -GH-SKT型承插焊接管台
SW Boss |

XYG—GH系列焊接接头



XYG — GH Welding fitting

特性

每一个接头都刻有规格、尺寸及商标。
每一个接头都经过去毛刺及除油脂处理。
直接头用高质量的棒料加工，其他形状的接头，用锻件及模锻件制造。
所有接头依据ANSI B16.11设计、制造及检测。

Feature

Each fitting is stamped with specification, size and trade mark.
Each fitting is finished by deburring and oil-removing.
The union is made with barstocks of high-quality and others are made with forgings and die forgings.
Designing, manufacturing and inspection are in accordance with ANSI B16.11.

技术参数 Technical Data

材料 Material

材料 Material	材料代码 Material Code	棒料 Barstock	锻件 Forgings
316不锈钢 316ss	ss	ASME SA479, ASTM A276	ASME SA182, ASTM A182

额定工作压力基础

选型表中的额定工作压力对应的温度是：-28℃to37℃，是按ASME/ANSI B31.3标准规定的许用应力137.8MPa计算得出，高于37℃时接头额定工作压力的降低系数参照ASME/ANSI B31.3标准规定，列于下表。

使用相同材料的接头进行焊接确保得到相同的膨胀系数和良好的焊接接口。

Rated Working Pressure

The corresponding temperature to the rated working pressure listed in the following table is -28℃to37℃, which is calculated in accordance with the allowable stress specified in ASME/ANSI B31.3. The decreasing coefficient of the rated working pressure for fittings above 37℃ is referred to the specifications of ASME/ANSI B31.3, listed in the following table.

The same expansion coefficient and good welding welding joint can only be gotten by welding with fittings of same materials.

额定工作压力降低系数表 Decreasing Coefficient Table for Rated Working Pressure

材料形式 Material Type 规范 Specification °C	棒料 Stockbar ASME SA479, ASTM A276 系数 Coefficient	锻件 Forging ASME SA182, ASTM A182 系数 Coefficient
-28to37	1.00	1.00
93	0.86	0.71
148	0.78	0.63
204	0.71	0.57
260	0.66	0.53
315	0.63	0.50
343	0.62	0.49
371	0.60	0.48
398	0.60	0.47
426	0.59	0.46
454	0.58	0.45


如需满足B31.1标准，计算额定工作压力时要在上表系数的基础上再乘以0.94

The rated working pressure should time 0.94 based on the coefficient listed in the above talbe to meet the standard B31.1.

订货方法 Order Information


SS	GH	3	TCHF PCH	8
316ss不锈钢	Welding Series 焊接接头系列	3 通 Tee	T 管承插焊 P 管对焊	1/2in 尺寸 T Tube SW P Tube BW
SS	GH	3	TCHF PCH	22mm
316ss不锈钢	Welding Series 焊接接头系列	3 通 Tee	T 管承插焊 P 管对焊	公称尺寸 22mm Nominal Size T Tube SW P Tube BW

● -GH6-TCHF型承插焊直通SW Straight Fitting




基本订货号 Order information	T in./mm	D		A		L		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH6-TCHF-4	1/4	0.19	4.8	0.48	12.2	0.75	19.0	10000
-GH6-TCHF-6	3/8	0.28	7.1	0.60	15.2	0.88	22.4	8000
-GH6-TCHF-8	1/2	0.41	10.4	0.73	18.5	1.06	26.9	6600
-GH6-TCHF-10	5/8	0.50	12.7	0.86	21.8	1.18	30.0	6000
-GH6-TCHF-12	3/4	0.63	16.0	1.04	26.4	1.31	33.3	5900
-GH6-TCHF-16	1	0.88	22.4	1.36	34.5	1.44	36.6	5600
-GH6-TCHF-8mm	8	0.24	6	0.55	14	0.79	20	3800
-GH6-TCHF-10mm	10	0.31	8	0.63	16	0.87	22	3600
-GH6-TCHF-12mm	12	0.39	10	0.75	19	0.98	25	3560
-GH6-TCHF-14mm	14	0.43	11	0.83	21	1.06	27	3500
-GH6-TCHF-16mm	16	0.47	12	0.94	24	1.14	29	3160
-GH6-TCHF-18mm	18	0.55	14	1.02	26	1.26	32	2870
-GH6-TCHF-20mm	20	0.59	15	1.14	29	1.34	34	2700
-GH6-TCHF-25mm	25	0.75	19	1.34	34	1.42	36	2640

● -GH6R-TCHF型承插焊异径直通SW Reducer

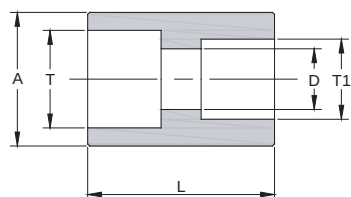


基本订货号 Order information	T in./mm	T1 in./mm	D		A		L		压力等级 PSI
			英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH6R-TCHF-4-6	1/4	3/8	0.19	4.8	0.60	15.2	0.88	22.4	10000
-GH6R-TCHF-4-8	1/4	1/2	0.19	4.8	0.73	18.5	1.06	26.9	8000
-GH6R-TCHF-4-10	1/4	5/8	0.19	4.8	0.86	21.8	1.18	30.0	6600
-GH6R-TCHF-6-8	3/8	1/2	0.28	7.1	0.73	18.5	1.06	26.9	6000
-GH6R-TCHF-6-10	3/8	5/8	0.28	7.1	0.86	21.8	1.18	30.0	5900
-GH6R-TCHF-6-12	3/8	3/4	0.28	7.1	1.04	26.4	1.31	33.3	5600
-GH6R-TCHF-8-10	1/2	5/8	0.41	10.4	0.86	21.8	1.18	30.0	3800
-GH6R-TCHF-8-12	1/2	3/4	0.41	10.4	1.04	26.4	1.31	33.3	3600
-GH6R-TCHF-10-12	5/8	3/4	0.50	12.7	1.04	26.4	1.31	33.3	3600
-GH6R-TCHF-8mm-10mm	8	10	0.24	6	0.63	16	0.87	22	3800
-GH6R-TCHF-8mm-12mm	8	12	0.24	6	0.75	19	0.98	25	3800
-GH6R-TCHF-10mm-12mm	10	12	0.31	8	0.75	19	0.98	25	3600
-GH6R-TCHF-10mm-14mm	10	14	0.31	8	0.83	21	1.06	27	3600
-GH6R-TCHF-12mm-14mm	12	14	0.39	10	0.83	21	1.06	27	3560
-GH6R-TCHF-12mm-16mm	12	16	0.39	10	0.94	24	1.14	29	3560
-GH6R-TCHF-14mm-16mm	14	16	0.43	11	0.94	24	1.14	29	3500
-GH6R-TCHF-16mm-18mm	16	18	0.47	12	1.02	26	1.26	32	3160
-GH6R-TCHF-16mm-20mm	16	20	0.47	12	1.14	29	1.34	34	3160
-GH6R-TCHF-20mm-25mm	20	25	0.59	15	1.34	34	1.42	36	2700

● -GH9-TCHF型承插焊弯通SW Elbow

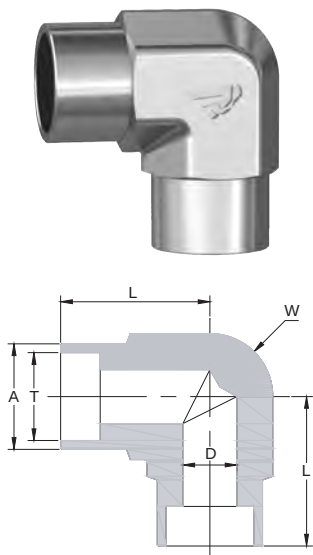


基本订货号 Order information	T	D		A		L		W		压力等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
—GH9—TCHF—4	1/4	0.19	4.8	0.48	12.2	0.75	19	0.50	12.7	10000
—GH9—TCHF—6	3/8	0.28	7.1	0.60	15.2	0.94	24	0.69	17.5	8000
—GH9—TCHF—8	1/2	0.41	10.4	0.73	18.5	1.02	26	0.75	19.0	6600
—GH9—TCHF—10	5/8	0.50	12.7	0.86	21.8	1.10	28	0.94	23.8	6000
—GH9—TCHF—12	3/4	0.63	16.0	1.04	26.4	1.18	30	1.06	27.0	5900
—GH9—TCHF—16	1	0.88	22.4	1.36	34.5	1.42	36	1.30	33.0	5600
—GH9—TCHF—8mm	8	0.24	6	0.55	14.0	0.83	21	0.56	14.3	3800
—GH9—TCHF—10mm	10	0.31	8	0.63	16.0	0.94	24	0.69	17.5	3600
—GH9—TCHF—12mm	12	0.39	10	0.73	18.5	1.02	26	0.75	19.0	3560
—GH9—TCHF—14mm	14	0.43	11	0.81	20.5	1.02	26	0.82	20.8	3500
—GH9—TCHF—16mm	16	0.47	12	0.93	23.5	1.10	28	0.94	23.8	3160
—GH9—TCHF—18mm	18	0.55	14	1.02	26.0	1.18	30	1.06	27.0	2870
—GH9—TCHF—20mm	20	0.59	15	1.04	26.5	1.18	30	1.06	27.0	2700
—GH9—TCHF—25mm	25	0.75	19	1.34	34.0	1.42	36	1.30	33.0	2640

● -GH5-TCHF型承插焊45° 弯通SW 45° Elbow

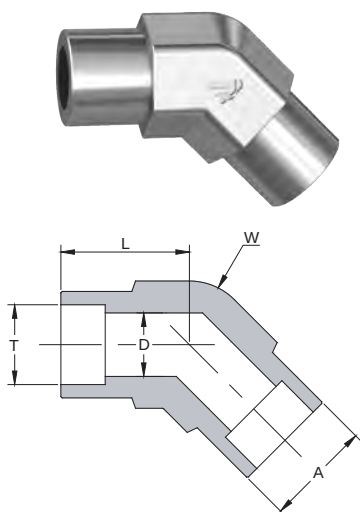


基本订货号 Order information	T	D		A		L		W		压力等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
—GH5—TCHF—4	1/4	0.19	4.8	0.48	12.2	0.75	19	0.50	12.7	10000
—GH5—TCHF—6	3/8	0.28	7.1	0.60	15.2	0.94	24	0.69	17.5	8000
—GH5—TCHF—8	1/2	0.41	10.4	0.73	18.5	1.02	26	0.75	19.0	6600
—GH5—TCHF—10	5/8	0.50	12.7	0.86	21.8	1.10	28	0.94	23.8	6000
—GH5—TCHF—12	3/4	0.63	16.0	1.04	26.4	1.18	30	1.06	27.0	5900
—GH5—TCHF—16	1	0.88	22.4	1.36	34.5	1.42	36	1.30	33.0	5600
—GH5—TCHF—8mm	8	0.24	6	0.55	14.0	0.83	21	0.56	14.3	3800
—GH5—TCHF—10mm	10	0.31	8	0.63	16.0	0.94	24	0.69	17.5	3600
—GH5—TCHF—12mm	12	0.39	10	0.73	18.5	1.02	26	0.75	19.0	3560
—GH5—TCHF—14mm	14	0.43	11	0.81	20.5	1.02	26	0.82	20.8	3500
—GH5—TCHF—16mm	16	0.47	12	0.93	23.5	1.10	28	0.94	23.8	3160
—GH5—TCHF—18mm	18	0.55	14	1.02	26.0	1.18	30	1.06	27.0	2870
—GH5—TCHF—20mm	20	0.59	15	1.04	26.5	1.18	30	1.06	27.0	2700
—GH5—TCHF—25mm	25	0.75	19	1.34	34.0	1.42	36	1.30	33.0	2640

● -GH3-TCHF型承插焊三通SW Tee

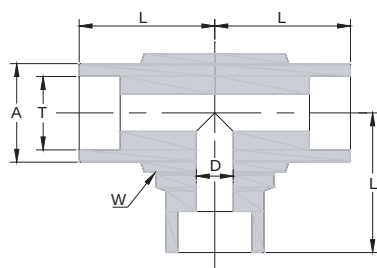

基本订货号 Order information	T in./mm	D		A		L		W		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH3-TCHF-2	1/8	0.11	2.8	0.35	9.0	0.55	14	0.37	9.5	10000
-GH3-TCHF-4	1/4	0.19	4.8	0.48	12.2	0.75	19	0.50	12.7	10000
-GH3-TCHF-6	3/8	0.28	7.1	0.60	15.2	0.94	24	0.69	17.5	8000
-GH3-TCHF-8	1/2	0.41	10.4	0.73	18.5	1.02	26	0.75	19.0	6600
-GH3-TCHF-10	5/8	0.50	12.7	0.86	21.8	1.10	28	0.94	23.8	6000
-GH3-TCHF-12	3/4	0.63	16.0	1.04	26.4	1.18	30	1.06	27.0	5900
-GH3-TCHF-16	1	0.88	22.4	1.36	34.5	1.42	36	1.30	33.0	5600
-GH3-TCHF-8mm	8	0.24	6	0.55	14.0	0.83	21	0.56	14.3	3800
-GH3-TCHF-10mm	10	0.31	8	0.63	16.0	0.94	24	0.69	17.5	3600
-GH3-TCHF-12mm	12	0.39	10	0.73	18.5	1.02	26	0.75	19.0	3560
-GH3-TCHF-14mm	14	0.43	11	0.81	20.5	1.02	26	0.82	20.8	3500
-GH3-TCHF-16mm	16	0.47	12	0.93	23.5	1.10	28	0.94	23.8	3160
-GH3-TCHF-18mm	18	0.55	14	1.02	26.0	1.18	30	1.06	27.0	2870
-GH3-TCHF-20mm	20	0.59	15	1.04	26.5	1.18	30	1.06	27.0	2700
-GH3-TCHF-25mm	25	0.75	19	1.34	34.0	1.42	36	1.30	33.0	2640

● -GH4-TCHF型承插焊四通SW Cross

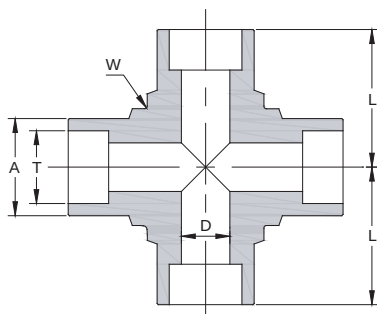


基本订货号 Order information	T in./mm	D		A		L		W		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH4-TCHF-4	1/4	0.19	4.8	0.48	12.2	0.75	19	0.50	12.7	10000
-GH4-TCHF-6	3/8	0.28	7.1	0.60	15.2	0.94	24	0.69	17.5	8000
-GH4-TCHF-8	1/2	0.41	10.4	0.73	18.5	1.02	26	0.75	19.0	6600
-GH4-TCHF-10	5/8	0.50	12.7	0.86	21.8	1.10	28	0.94	23.8	6000
-GH4-TCHF-12	3/4	0.63	16.0	1.04	26.4	1.18	30	1.06	27.0	5900
-GH4-TCHF-16	1	0.88	22.4	1.36	34.5	1.42	36	1.30	33.0	5600
-GH4-TCHF-8mm	8	0.24	6	0.55	14.0	0.83	21	0.56	14.3	3800
-GH4-TCHF-10mm	10	0.31	8	0.63	16.0	0.94	24	0.69	17.5	3600
-GH4-TCHF-12mm	12	0.39	10	0.73	18.5	1.02	26	0.75	19.0	3560
-GH4-TCHF-14mm	14	0.43	11	0.81	20.5	1.02	26	0.82	20.8	3500
-GH4-TCHF-16mm	16	0.47	12	0.93	23.5	1.10	28	0.94	23.8	3160
-GH4-TCHF-18mm	18	0.55	14	1.02	26.0	1.18	30	1.06	27.0	2870
-GH4-TCHF-20mm	20	0.59	15	1.04	26.5	1.18	30	1.06	27.0	2700
-GH4-TCHF-25mm	25	0.75	19	1.34	34.0	1.42	36	1.30	33.0	2640

XYG—GH系列焊接接头


XYG — GH Welding fitting

● -GH1-TCHF型承插焊外螺纹直通SW Male Straight Fitting

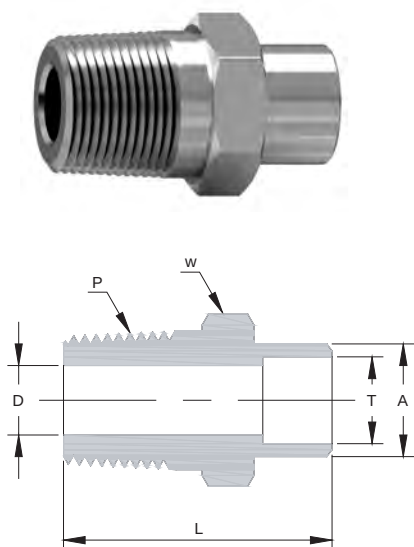


基本订货号 Order information	T	P	D		A		L		W		压力 等级 PSI
	in/mm	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH1-TCHF-4-4	1/4	1/4	0.19	4.8	0.48	12.2	1.14	29	0.56	14.2	3800
-GH1-TCHF-6-4	3/8	1/4	0.28	7.1	0.60	15.2	1.26	32	0.62	15.8	3800
-GH1-TCHF-6-6	3/8	3/8	0.28	7.1	0.60	15.2	1.26	32	0.69	17.4	3700
-GH1-TCHF-6-8	3/8	1/2	0.28	7.1	0.60	15.2	1.46	37	0.87	22.2	3700
-GH1-TCHF-8-4	1/2	1/4	0.41	10.4	0.73	18.5	1.30	33	0.75	19.0	3100
-GH1-TCHF-8-6	1/2	3/8	0.41	10.4	0.73	18.5	1.30	33	0.75	19.0	3100
-GH1-TCHF-8-8	1/2	1/2	0.41	10.4	0.73	18.5	1.50	38	0.87	22.2	3100
-GH1-TCHF-12-8	3/4	1/2	0.63	16.0	1.04	26.4	1.73	43.9	1.06	27.0	2900
-GH1-TCHF-8mm-4	8	1/4	0.24	6	0.55	14	1.18	30	0.56	14.2	3800
-GH1-TCHF-12mm-4	12	1/4	0.39	10	0.73	18.5	1.26	32	0.75	19.0	3560
-GH1-TCHF-12mm-6	12	3/8	0.39	10	0.73	18.5	1.34	34	0.75	19.0	3560
-GH1-TCHF-12mm-8	12	1/2	0.39	10	0.73	18.5	1.42	36	0.87	22.2	3560
-GH1-TCHF-14mm-6	14	3/8	0.43	11	0.81	20.5	1.42	36	0.87	22.2	3500
-GH1-TCHF-14mm-8	14	1/2	0.43	11	0.81	20.5	1.50	38	0.87	22.2	3500
-GH1-TCHF-16mm-8	16	1/2	0.47	12	0.93	23.5	1.54	39	0.94	24.0	3160
-GH1-TCHF-20mm-8	20	1/2	0.59	15	1.04	26.5	1.73	43.9	1.06	27.0	2760

● -GH7-TCHF型承插焊内螺纹直通SW Female Straight Fitting

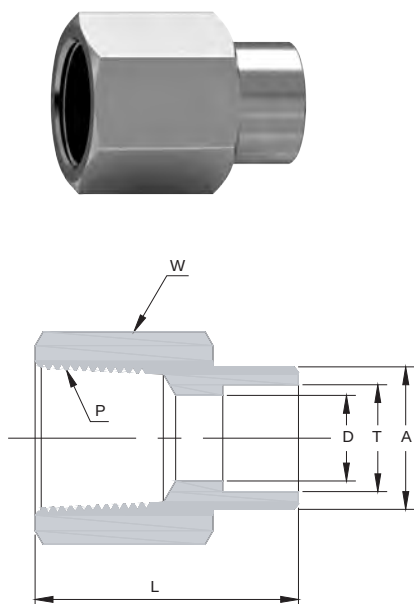


基本订货号 Order information	T	P	D		A		L		W		压力 等级 PSI
	in/mm	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH7-TCHF-2-2	1/8	1/8	0.11	2.8	0.35	9.0	0.83	21.1	0.56	14.2	3080
-GH7-TCHF-4-2	1/4	1/8	0.19	4.8	0.48	12.2	1.05	26.7	0.56	14.2	3080
-GH7-TCHF-4-4	1/4	1/4	0.19	4.8	0.48	12.2	1.18	30.0	0.75	19.0	3100
-GH7-TCHF-6-4	3/8	1/4	0.28	7.1	0.60	15.2	1.24	31.5	0.75	19.0	3100
-GH7-TCHF-8-6	1/2	3/8	0.41	10.4	0.73	18.5	1.36	34.5	0.87	22.2	2500
-GH7-TCHF-8-8	1/2	1/2	0.41	10.4	0.73	18.5	1.59	40.4	1.06	27.0	2320
-GH7-TCHF-12-12	3/4	3/4	0.63	16.0	1.04	26.4	1.73	43.9	1.31	33.3	2180
-GH7-TCHF-8mm-4	8	1/4	0.24	6	0.55	14	1.24	31.5	0.75	19.0	3100
-GH7-TCHF-10mm-4	10	1/4	0.31	8	0.63	16	1.26	32.0	0.75	19.0	3100
-GH7-TCHF-14mm-6	14	3/8	0.43	11	0.81	20.5	1.38	35.0	0.87	22.2	2500
-GH7-TCHF-14mm-8	14	1/2	0.43	11	0.81	20.5	1.61	41.0	1.06	27.0	2300
-GH7-TCHF-16mm-8	16	1/2	0.47	12	0.93	23.5	1.69	43.0	1.06	27.0	2300
-GH7-TCHF-20mm-12	20	3/4	0.59	15	1.04	26.5	1.73	44.0	1.31	33.3	2300
-GH7-TCHF-25mm-12	25	3/4	0.75	19	1.34	34	1.81	46.0	1.31	33.3	2300

● -GH2-TCHF型承插焊外螺纹弯通SW Male Elbow

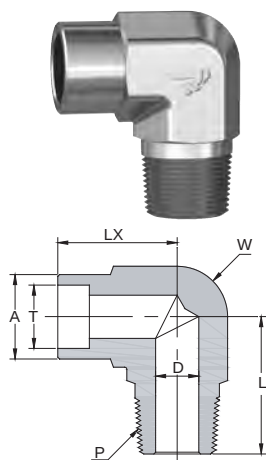


基本订货号 Order information	T	P	D		A		L		Lx		W		压力等级 PSI
	in/mm	(NPT)	英寸	毫米	英寸	毫米	英寸	毫米	英寸	毫米	英寸	毫米	
-GH2-TCHF-4-4	1/4	1/4	0.19	4.8	0.48	12.2	0.94	24	0.83	21	0.56	14.2	3800
-GH2-TCHF-6-4	3/8	1/4	0.28	7.1	0.60	15.2	1.02	26	0.91	23	0.69	17.4	3800
-GH2-TCHF-6-6	3/8	3/8	0.28	7.1	0.60	15.2	1.02	26	0.94	24	0.69	17.4	3700
-GH2-TCHF-6-8	3/8	1/2	0.28	7.1	0.60	15.2	1.34	34	1.02	26	0.94	23.8	3650
-GH2-TCHF-8-8	1/2	1/2	0.41	10.4	0.73	18.5	1.34	34	1.02	26	0.94	23.8	3100
-GH2-TCHF-12-12	3/4	3/4	0.63	16	1.04	26.4	1.46	37	1.18	30	1.06	27.0	2950
-GH2-TCHF-8mm-4	8	1/4	0.24	6	0.55	14	0.94	24	0.83	21	0.56	14.2	3100
-GH2-TCHF-10mm-4	10	1/4	0.31	8	0.63	16	1.02	26	0.91	23	0.69	17.4	3100
-GH2-TCHF-12mm-6	12	3/8	0.39	10	0.73	18.5	1.10	28	1.02	26	0.75	19.0	2500
-GH2-TCHF-14mm-8	14	1/2	0.43	11	0.81	20.5	1.34	34	1.02	26	0.94	23.8	2300
-GH2-TCHF-16mm-8	16	1/2	0.47	12	0.93	23.5	1.34	34	1.02	26	0.94	23.8	2300
-GH2-TCHF-20mm-12	20	3/4	0.59	15	1.04	26.5	1.46	37	1.18	30	1.06	27.0	2300
-GH2-TCHF-25mm-12	25	3/4	0.75	19	1.34	34	1.81	46	1.42	36	1.31	33.3	2300

● -GH8-TCHF型承插焊内螺纹弯通SW Female Elbow

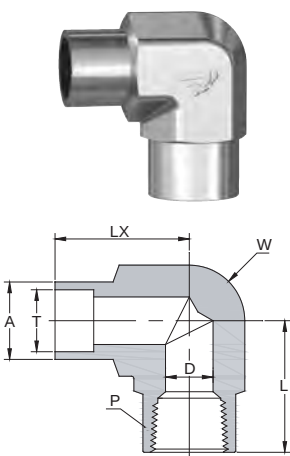


基本订货号 Order information	T	P	D		A		L		Lx		W		压力等级 PSI
	in/mm	(NPT)	英寸	毫米	英寸	毫米	英寸	毫米	英寸	毫米	英寸	毫米	
-GH8-TCHF-4-4	1/4	1/4	0.19	4.8	0.48	12.2	1.02	26	0.91	23	0.69	17.4	3000
-GH8-TCHF-4-6	1/4	3/8	0.19	4.8	0.48	12.2	1.30	33	1.02	26	0.82	20.8	2800
-GH8-TCHF-6-6	3/8	3/8	0.28	7.1	0.60	15.2	1.30	33	1.02	26	0.82	20.8	2500
-GH8-TCHF-6-8	3/8	1/2	0.28	7.1	0.60	15.2	1.46	37	1.18	30	1.06	27	2100
-GH8-TCHF-8-8	1/2	1/2	0.41	10.4	0.73	18.5	1.46	37	1.18	30	1.06	27	2100
-GH8-TCHF-12-12	3/4	3/4	0.63	16	1.04	26.4	1.81	46	1.42	36	1.31	33.3	2100
-GH8-TCHF-8mm-4	8	1/4	0.24	6	0.55	14	1.02	26	0.91	23	0.69	17.4	3000
-GH8-TCHF-10mm-4	10	1/4	0.31	8	0.63	16	1.02	26	0.91	23	0.69	17.4	3000
-GH8-TCHF-12mm-6	12	3/8	0.39	10	0.73	18.5	1.30	33	1.02	26	0.82	20.8	2800
-GH8-TCHF-14mm-6	14	3/8	0.43	11	0.81	20.5	1.30	33	1.02	26	0.82	20.8	2600
-GH8-TCHF-16mm-8	16	1/2	0.47	12	0.93	23.5	1.46	37	1.18	30	1.06	27	2100
-GH8-TCHF-18mm-8	18	1/2	0.55	14	1.02	26	1.46	37	1.18	30	1.06	27	2100

● -GH6-PCHF型承插焊直通SW Straight Fitting

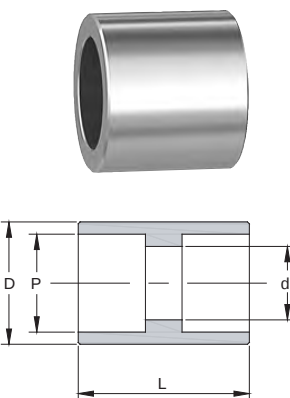


基本订货号 Order information	DN	P		D		d		L		压力等级 PSI
	(in)	英寸	毫米	英寸	毫米	英寸	毫米	英寸	毫米	
-GH6-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	0.87	22	3000
-GH6-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	1.02	26	3000
-GH6-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	1.26	32	3000
-GH6-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	1.42	36	3000
-GH6-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	1.65	42	3000
-GH6-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	1.81	46	3000
-GH6-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	1.97	50	3000
-GH6-PCHF-4X	1/4	0.55	14	0.87	22	0.24	6	0.87	22	6000
-GH6-PCHF-6X	3/8	0.67	17	1.06	27	0.31	8	1.02	26	6000
-GH6-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	1.26	32	6000
-GH6-PCHF-12X	3/4	1.06	27	1.54	39	0.58	14.8	1.42	36	6000
-GH6-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	1.65	42	6000
-GH6-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	1.81	46	6000
-GH6-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	1.97	50	6000

● -GH6R-PCHF型承插焊异径直通SW Reducer

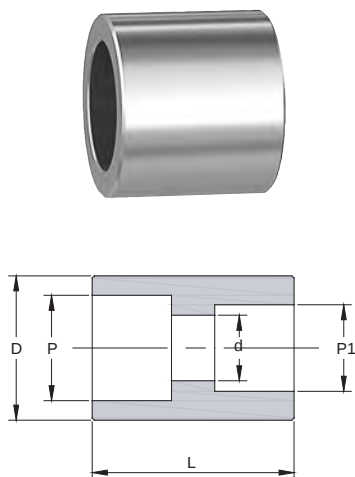


基本订货号 Order information	DN (in)	P1		P		D		d		L		压力 等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH6R-PCHF-4-6	1/4-3/8	0.55	14	0.67	17	0.94	24	0.31	8	1.02	26	3000
-GH6R-PCHF-6-8	3/8-1/2	0.67	17	0.85	21.7	1.14	29	0.39	10	1.26	32	3000
-GH6R-PCHF-8-12	1/2-3/4	0.85	21.7	1.06	27	1.40	35.5	0.59	15	1.42	36	3000
-GH6R-PCHF-12-16	3/4-1	1.06	27	1.33	33.8	1.72	43.8	0.79	20	1.65	42	3000
-GH6R-PCHF-16-20	1-1 1/4	1.33	33.8	1.67	42.5	2.09	53.1	1.02	26	1.81	46	3000
-GH6R-PCHF-20-24	1 1/4-1 1/2	1.67	42.5	1.91	48.6	2.35	59.6	1.34	34	1.97	50	3000
-GH6R-PCHF-24-12	1 1/2-3/4	1.91	48.6	1.06	27	2.35	59.6	0.79	20	1.97	50	3000
-GH6R-PCHF-24-16	1 1/2-1	1.91	48.6	1.33	33.8	2.35	59.6	1.02	26	1.97	50	3000
-GH6R-PCHF-4X-6X	1/4-3/8	0.55	14	0.67	17	1.06	27	0.24	6	1.02	26	6000
-GH6R-PCHF-6X-8X	3/8-1/2	0.67	17	0.85	21.7	1.30	33	0.31	8	1.26	32	6000
-GH6R-PCHF-8X-12X	1/2-3/4	0.85	21.7	1.06	27	1.54	39	0.43	11	1.42	36	6000
-GH6R-PCHF-12X-16X	3/4-1	1.06	27	1.33	33.8	1.89	48	0.58	14.8	1.65	42	6000
-GH6R-PCHF-16X-20X	1-1 1/4	1.33	33.8	1.67	42.5	2.24	57	0.79	20	1.81	46	6000
-GH6R-PCHF-20X-24X	1 1/4-1 1/2	1.67	42.5	1.91	48.6	2.52	64	1.13	28.7	1.97	50	6000
-GH6R-PCHF-24X-12X	1 1/2-3/4	1.91	48.6	1.06	27	2.52	64	0.58	14.8	1.97	50	6000
-GH6R-PCHF-24X-16X	1 1/2-1	1.91	48.6	1.33	33.8	2.52	64	0.79	20	1.97	50	6000

● -GH9-PCHF型承插焊弯通SW Elbow

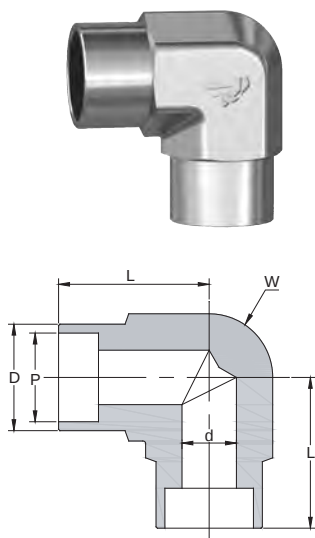


基本订货号 Order information	DN (in)	P		D		d		L		W		压力 等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH9-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	1.02	26	0.82	20.8	3000
-GH9-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	1.10	28	0.94	23.8	3000
-GH9-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	1.18	30	1.18	30.0	3000
-GH9-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	1.42	36	1.30	33.0	3000
-GH9-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	1.50	38	1.50	38.0	3000
-GH9-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	1.73	44	1.81	46.0	3000
-GH9-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	1.89	48	1.97	50.0	3000
-GH9-PCHF-4X	1/4	0.55	14	0.87	22	0.24	6	1.02	26	0.94	23.8	6000
-GH9-PCHF-6X	3/8	0.67	17	1.06	27	0.31	8	1.10	28	1.06	27.0	6000
-GH9-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	1.18	30	1.18	30.0	6000
-GH9-PCHF-12X	3/4	1.06	27	1.54	39	0.58	14.8	1.42	36	1.30	33.0	6000
-GH9-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	1.50	38	1.81	46.0	6000
-GH9-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	1.73	44	1.97	50.0	6000
-GH9-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	1.89	48	2.28	58.0	6000

● -GH5-PCHF型承插焊45° 弯通 SW 45° Elbow

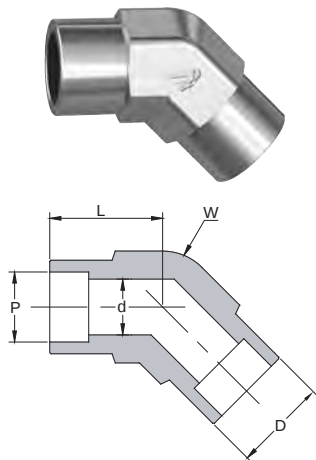


基本订货号 Order information	DN (in)	P		D		d		L		W		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH5-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	1.02	26	0.82	20.8	3000
-GH5-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	1.10	28	0.94	23.8	3000
-GH5-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	1.18	30	1.18	30.0	3000
-GH5-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	1.42	36	1.30	33.0	3000
-GH5-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	1.50	38	1.50	38.0	3000
-GH5-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	1.73	44	1.81	46.0	3000
-GH5-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	1.89	48	1.97	50.0	3000
-GH5-PCHF-4X	1/4	0.55	14	0.87	22	0.24	6	1.02	26	0.94	23.8	6000
-GH5-PCHF-6X	3/8	0.67	17	1.06	27	0.31	8	1.10	28	1.06	27.0	6000
-GH5-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	1.18	30	1.18	30.0	6000
-GH5-PCHF-12X	3/4	1.06	27	1.54	39	0.58	14.8	1.42	36	1.30	33.0	6000
-GH5-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	1.50	38	1.81	46.0	6000
-GH5-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	1.73	44	1.97	50.0	6000
-GH5-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	1.89	48	2.28	58.0	6000

● -GH3-PCHF型承插焊三通SW Tee

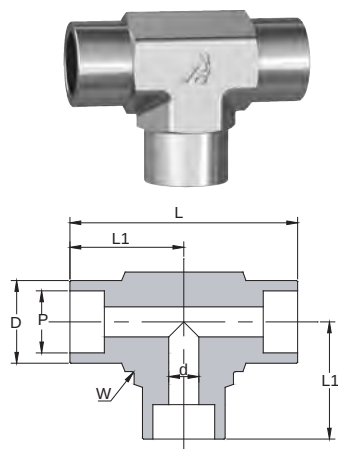


基本订货号 Order information	DN (in)	P		D		d		L		L1		W		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH3-PCHF-4	1/4	0.55	14.0	0.79	20	0.31	8	2.05	52	1.02	26	0.82	20.8	3000
-GH3-PCHF-6	3/8	0.67	17.0	0.94	24	0.39	10	2.20	56	1.10	28	0.94	23.8	3000
-GH3-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	2.36	60	1.18	30	1.18	30.0	3000
-GH3-PCHF-12	3/4	1.06	27.0	1.40	35.5	0.79	20	2.83	72	1.42	36	1.30	33.0	3000
-GH3-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	2.99	76	1.50	38	1.50	38.0	3000
-GH3-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	3.46	88	1.73	44	1.81	46.0	3000
-GH3-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	3.78	96	1.89	48	1.97	50.0	3000
-GH3-PCHF-4X	1/4	0.55	14.0	0.87	22	0.24	6	2.05	52	1.02	26	0.94	23.8	6000
-GH3-PCHF-6X	3/8	0.67	17.0	1.06	27	0.31	8	2.20	56	1.10	28	1.06	27.0	6000
-GH3-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	2.36	60	1.18	30	1.18	30.0	6000
-GH3-PCHF-12X	3/4	1.06	27.0	1.54	39	0.58	14.8	2.83	72	1.42	36	1.30	33.0	6000
-GH3-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	2.99	76	1.50	38	1.81	46.0	6000
-GH3-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	3.46	88	1.73	44	1.97	50.0	6000
-GH3-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	3.78	96	1.89	48	2.28	58.0	6000

● -GH6-PCHF型承插焊直通SW Straight Fitting

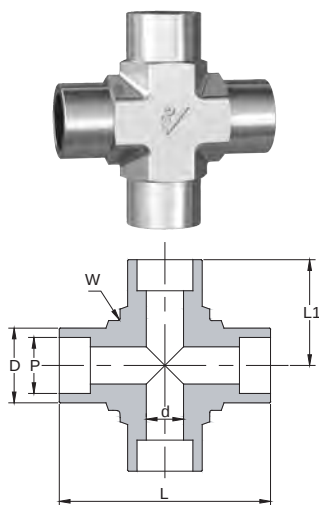


基本订货号 Order information	DN (in)	P		D		d		L		L1		W		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH4-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	2.05	52	1.02	26	0.82	20.8	3000
-GH4-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	2.20	56	1.10	28	0.94	23.8	3000
-GH4-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	2.36	60	1.18	30	1.18	30.0	3000
-GH4-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	2.83	72	1.42	36	1.30	33.0	3000
-GH4-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	2.99	76	1.50	38	1.50	38.0	3000
-GH4-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	3.46	88	1.73	44	1.81	46.0	3000
-GH4-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	3.78	96	1.89	48	1.97	50.0	3000
-GH4-PCHF-4X	1/4	0.55	14	0.87	22	0.24	6	2.05	52	1.02	26	0.94	23.8	6000
-GH4-PCHF-6X	3/8	0.67	17	1.06	27	0.31	8	2.20	56	1.10	28	1.06	27.0	6000
-GH4-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	2.36	60	1.18	30	1.18	30.0	6000
-GH4-PCHF-12X	3/4	1.06	27	1.54	39	0.58	14.8	2.83	72	1.42	36	1.30	33.0	6000
-GH4-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	2.99	76	1.50	38	1.81	46.0	6000
-GH4-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	3.46	88	1.73	44	1.97	50.0	6000
-GH4-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	3.78	96	1.89	48	2.28	58.0	6000

● -GHC-PCHF型承插焊半管接头SW Half Union

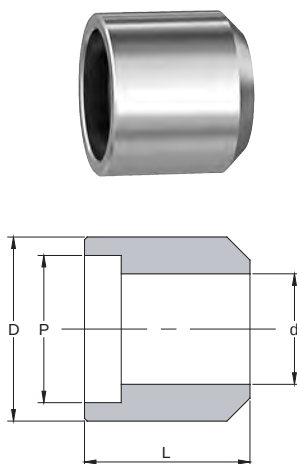


基本订货号 Order information	DN (in)	P		D		d		L		压力 等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GHC-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	0.87	22	3000
-GHC-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	1.02	26	3000
-GHC-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	1.26	32	3000
-GHC-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	1.42	36	3000
-GHC-PCHF-16	1	1.33	33.8	1.72	43.8	1.02	26	1.65	42	3000
-GHC-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	1.81	46	3000
-GHC-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	1.97	50	3000
-GHC-PCHF-4X	1/4	0.55	14	0.87	22	0.24	6	0.87	22	6000
-GHC-PCHF-6X	3/8	0.67	17	1.06	27	0.31	8	1.02	26	6000
-GHC-PCHF-8X	1/2	0.85	21.7	1.30	33	0.43	11	1.26	32	6000
-GHC-PCHF-12X	3/4	1.06	27	1.54	39	0.58	14.8	1.42	36	6000
-GHC-PCHF-16X	1	1.33	33.8	1.89	48	0.79	20	1.65	42	6000
-GHC-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.13	28.7	1.81	46	6000
-GHC-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.31	33.2	1.97	50	6000

● -GHP-PCHF型承插焊管帽SW Cap

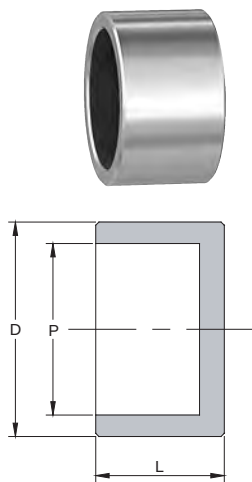


基本订货号 Order information	DN (in)	P		D		L		压力 等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GHP-PCHF-4	1/4	0.55	14	0.79	20	0.55	14	3000
-GHP-PCHF-6	3/8	0.67	17	0.94	24	0.63	16	3000
-GHP-PCHF-8	1/2	0.85	21.7	1.14	29	0.71	18	3000
-GHP-PCHF-12	3/4	1.06	27	1.40	35.5	0.83	21	3000
-GHP-PCHF-16	1	1.33	33.8	1.72	43.8	0.91	23	3000
-GHP-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	0.98	25	3000
-GHP-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.10	28	3000
-GHP-PCHF-4X	1/4	0.55	14	0.87	22	0.59	15	6000
-GHP-PCHF-6X	3/8	0.67	17	1.06	27	0.71	18	6000
-GHP-PCHF-8X	1/2	0.85	21.7	1.30	33	0.79	20	6000
-GHP-PCHF-12X	3/4	1.06	27	1.54	39	0.91	23	6000
-GHP-PCHF-16X	1	1.33	33.8	1.89	48	1.02	26	6000
-GHP-PCHF-20X	1 1/4	1.67	42.5	2.24	57	1.14	29	6000
-GHP-PCHF-24X	1 1/2	1.91	48.6	2.52	64	1.26	32	6000

● -GHU-PCHF型承插焊活接头SW Union

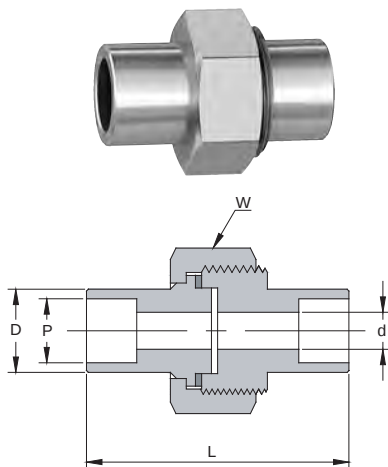


基本订货号 Order information	DN (in)	P		D		d		L		W		压力 等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GHU-PCHF-4	1/4	0.55	14	0.79	20	0.31	8	1.57	40	1.57	40	3000
-GHU-PCHF-6	3/8	0.67	17	0.94	24	0.39	10	1.73	44	1.73	44	3000
-GHU-PCHF-8	1/2	0.85	21.7	1.14	29	0.59	15	1.97	50	1.97	50	3000
-GHU-PCHF-12	3/4	1.06	27	1.40	35.5	0.79	20	2.28	58	2.36	60	3000
-GHU-PCHF-16	1	1.33	33.8	1.69	42.8	1.02	26	2.44	62	2.76	70	3000
-GHU-PCHF-20	1 1/4	1.67	42.5	2.09	53.1	1.34	34	2.83	72	3.15	80	3000
-GHU-PCHF-24	1 1/2	1.91	48.6	2.35	59.6	1.57	40	2.99	76	3.54	90	3000

● -GHU-TCH 型对焊活接头 BW Union

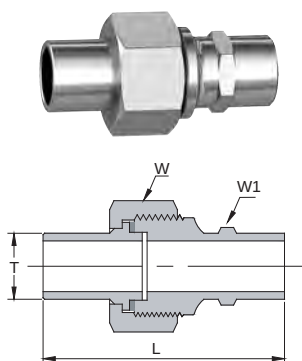


基本订货号 Order information	DN (in)	T		W		W1		L		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GHU-TCH-10mm	6	0.39	10	1.18	30	0.55	14	2.20	56	4800
-GHU-TCH-14mm	8	0.55	14	1.42	36	0.67	17	3.07	78	4800
-GHU-TCH-18mm	10	0.71	18	1.54	39	0.87	22	3.39	86	4800
-GHU-TCH-22mm	15	0.87	22	1.61	41	0.94	24	3.62	92	4800
-GHU-TCH-27mm	20	1.06	27	1.81	46	1.18	30	3.94	100	4800
-GHU-TCH-34mm	25	1.34	34	2.17	55	1.42	36	4.33	110	4800

● -GH6R-TCH型对焊异径直通BW Reducer

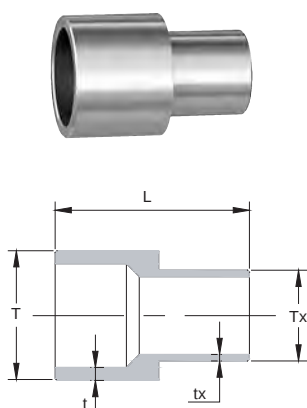

基本订货号 Order information	T	Tx	t		tx		L		压力 等级 PSI
	in/mm	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
—GH6R—TCH—6—4	3/8	1/4	0.035	0.9	0.035	0.9	1.18	30	3600
—GH6R—TCH—8—4	1/2	1/4	0.049	1.2	0.049	1.2	1.26	32	3300
—GH6R—TCH—8—6	1/2	3/8	0.049	1.2	0.049	1.2	1.34	34	3300
—GH6R—TCH—12—8	3/4	1/2	0.049	1.2	0.049	1.2	1.42	36	2400
—GH6R—TCH—16—8	1	1/2	0.065	1.7	0.049	1.2	1.50	38	2400
—GH6R—TCH—16—12	1	3/4	0.065	1.7	0.049	1.2	1.50	38	2100
—GH6R—TCH—10mm—6mm	10	6	0.039	1.0	0.039	1.0	1.18	30	3500
—GH6R—TCH—10mm—8mm	10	8	0.039	1.0	0.039	1.0	1.18	30	3500
—GH6R—TCH—12mm—6mm	12	6	0.039	1.0	0.039	1.0	1.26	32	3100
—GH6R—TCH—12mm—8mm	12	8	0.039	1.0	0.039	1.0	1.26	32	3100
—GH6R—TCH—12mm—10mm	12	10	0.039	1.0	0.039	1.0	1.34	34	3100
—GH6R—TCH—18mm—6mm	18	6	0.059	1.5	0.059	1.5	1.42	36	2900
—GH6R—TCH—18mm—12mm	18	12	0.059	1.5	0.059	1.5	1.50	38	2900


● -GH5-TCH型对焊45° 弯通BW 45° Elbow

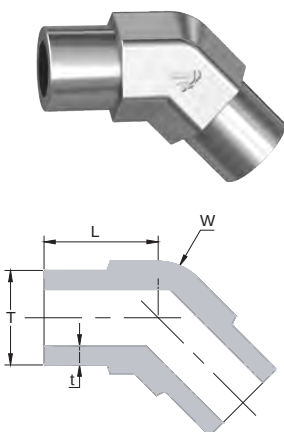

基本订货号 Order information	T	t		L		W		压力 等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
—GH5—TCH—2	1/8	0.028	0.7	0.51	13	0.31	7.9	5500
—GH5—TCH—4	1/4	0.035	0.9	0.63	16	0.37	9.5	5100
—GH5—TCH—6	3/8	0.035	0.9	0.75	19	0.50	12.7	3300
—GH5—TCH—8	1/2	0.049	1.2	0.83	21	0.56	14.2	3700
—GH5—TCH—12	3/4	0.049	1.2	0.98	25	0.82	20.8	3100
—GH5—TCH—16	1	0.065	1.7	1.10	28	1.06	27	2800
—GH5—TCH—6mm	6	0.039	1.0	0.51	13	0.31	7.9	6000
—GH5—TCH—8mm	8	0.039	1.0	0.63	16	0.37	9.5	4500
—GH5—TCH—10mm	10	0.039	1.0	0.75	19	0.50	12.7	3400
—GH5—TCH—12mm	12	0.039	1.0	0.83	21	0.56	14.2	2900
—GH5—TCH—14mm	14	0.059	1.5	0.91	23	0.69	17.4	2900
—GH5—TCH—16mm	16	0.059	1.5	0.94	24	0.69	17.4	2900
—GH5—TCH—18mm	18	0.059	1.5	0.98	25	0.75	19	2800


XYG — GH Welding fitting

● -GH9-TCH型对焊弯通BW Elbow

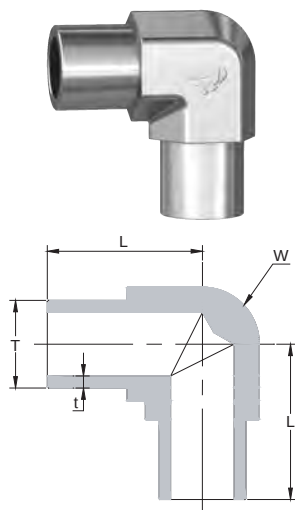


基本订货号 Order information	T	t		L		W		压力等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH9-TCH-2	1/8	0.028	0.7	0.51	13	0.31	7.9	5500
-GH9-TCH-4	1/4	0.035	0.9	0.63	16	0.37	9.5	5100
-GH9-TCH-6	3/8	0.035	0.9	0.75	19	0.50	12.7	3300
-GH9-TCH-8	1/2	0.049	1.2	0.83	21	0.56	14.2	3700
-GH9-TCH-12	3/4	0.049	1.2	0.98	25	0.82	20.8	3100
-GH9-TCH-16	1	0.065	1.7	1.10	28	1.06	27	2800
-GH9-TCH-6mm	6	0.039	1.0	0.51	13	0.31	7.9	6000
-GH9-TCH-8mm	8	0.039	1.0	0.63	16	0.37	9.5	4500
-GH9-TCH-10mm	10	0.039	1.0	0.75	19	0.50	12.7	3400
-GH9-TCH-12mm	12	0.039	1.0	0.83	21	0.56	14.2	2900
-GH9-TCH-14mm	14	0.059	1.5	0.91	23	0.69	17.4	2900
-GH9-TCH-16mm	16	0.059	1.5	0.94	24	0.69	17.4	2900
-GH9-TCH-18mm	18	0.059	1.5	0.98	25	0.75	19	2800

● -GH3-TCH型对焊三通BW Tee

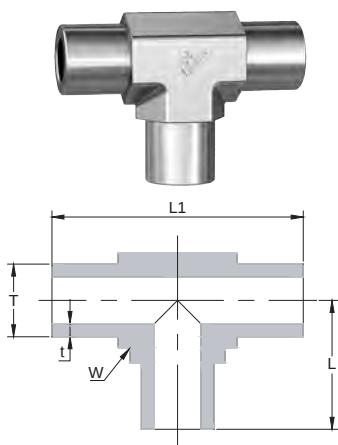


基本订货号 Order information	T	t		L		L1		W		压力等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH3-TCH-2	1/8	0.028	0.7	0.51	13	1.02	26	0.31	7.9	5500
-GH3-TCH-4	1/4	0.035	0.9	0.63	16	1.26	32	0.37	9.5	5100
-GH3-TCH-6	3/8	0.035	0.9	0.75	19	1.50	38	0.50	12.7	3300
-GH3-TCH-8	1/2	0.049	1.2	0.83	21	1.65	42	0.56	14.2	3700
-GH3-TCH-12	3/4	0.049	1.2	0.98	25	1.97	50	0.82	20.8	3100
-GH3-TCH-16	1	0.065	1.7	1.10	28	2.20	56	1.06	27	2800
-GH3-TCH-6mm	6	0.039	1.0	0.51	13	1.02	26	0.31	7.9	6000
-GH3-TCH-8mm	8	0.039	1.0	0.63	16	1.26	32	0.37	9.5	4500
-GH3-TCH-10mm	10	0.039	1.0	0.75	19	1.50	38	0.50	12.7	3400
-GH3-TCH-12mm	12	0.039	1.0	0.83	21	1.65	42	0.56	14.2	2900
-GH3-TCH-14mm	14	0.059	1.5	0.91	23	1.81	46	0.69	17.4	2900
-GH3-TCH-16mm	16	0.059	1.5	0.94	24	1.89	48	0.69	17.4	2900
-GH3-TCH-18mm	18	0.059	1.5	0.98	25	1.97	50	0.75	19	2800

● -GH4-TCH型对焊四通BW Cross

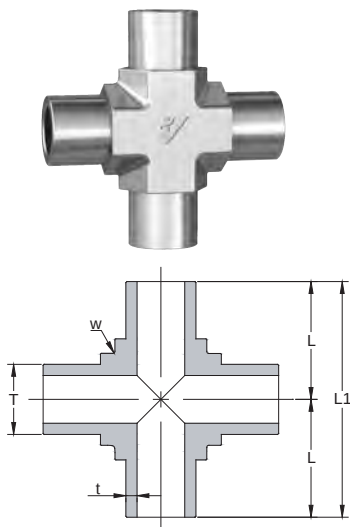


基本订货号 Order information	T	t		L		L1		W		压力等级 PSI
	in/mm	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH4-TCH-2	1/8	0.028	0.7	0.51	13	1.02	26	0.31	7.9	5500
-GH4-TCH-4	1/4	0.035	0.9	0.63	16	1.26	32	0.37	9.5	5100
-GH4-TCH-6	3/8	0.035	0.9	0.75	19	1.50	38	0.50	12.7	3300
-GH4-TCH-8	1/2	0.049	1.2	0.83	21	1.65	42	0.56	14.2	3700
-GH4-TCH-12	3/4	0.049	1.2	0.98	25	1.97	50	0.82	20.8	3100
-GH4-TCH-16	1	0.065	1.7	1.10	28	2.20	56	1.06	27	2800
-GH4-TCH-6mm	6	0.039	1.0	0.51	13	1.02	26	0.31	7.9	6000
-GH4-TCH-8mm	8	0.039	1.0	0.63	16	1.26	32	0.37	9.5	4500
-GH4-TCH-10mm	10	0.039	1.0	0.75	19	1.50	38	0.50	12.7	3400
-GH4-TCH-12mm	12	0.039	1.0	0.83	21	1.65	42	0.56	14.2	2900
-GH4-TCH-14mm	14	0.059	1.5	0.91	23	1.81	46	0.69	17.4	2900
-GH4-TCH-16mm	16	0.059	1.5	0.94	24	1.89	48	0.69	17.4	2900
-GH4-TCH-18mm	18	0.059	1.5	0.98	25	1.97	50	0.75	19	2800

● -GH1-TCH 型对焊外螺纹直通 BW Male Straight Fitting

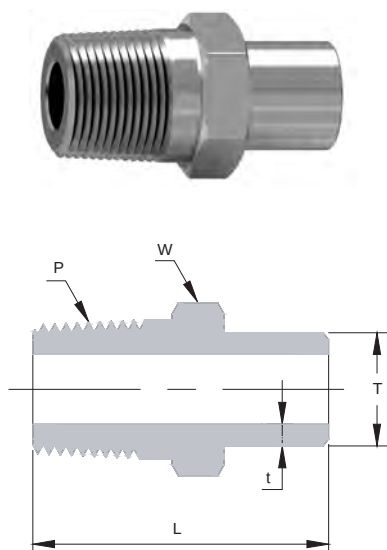


基本订货号 Order information	T in/mm	t		p (NPT)	L		W		压力 等级 PSI
		英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH1-TCH-4-2	1/4	0.049	1.2	1/8	1.02	26	0.44	11.1	3250
-GH1-TCH-6-2	3/8	0.049	1.2	1/8	1.14	29	0.44	11.1	2500
-GH1-TCH-6-4	3/8	0.049	1.2	1/4	1.26	32	0.56	14.2	2500
-GH1-TCH-8-2	1/2	0.065	1.7	1/8	1.30	33	0.56	14.2	2400
-GH1-TCH-8-4	1/2	0.065	1.7	1/4	1.46	37	0.56	14.2	2100
-GH1-TCH-12-4	3/4	0.095	2.4	1/4	1.69	43	0.87	22.2	2000
-GH1-TCH-12-6	3/4	0.095	2.4	3/8	1.77	45	0.87	22.2	2000
-GH1-TCH-12-8	3/4	0.095	2.4	1/2	1.89	48	0.87	22.2	1800
-GH1-TCH-16-8	1	0.109	2.8	1/2	2.09	53	1.06	27.0	1800
-GH1-TCH-8mm-2	8	0.079	2.0	1/8	1.02	26	0.44	11.1	4000
-GH1-TCH-8mm-4	8	0.079	2.0	1/4	1.18	30	0.56	14.2	3800
-GH1-TCH-10mm-2	10	0.079	2.0	1/8	1.18	30	0.56	14.2	3800
-GH1-TCH-10mm-4	10	0.079	2.0	1/4	1.26	32	0.56	14.2	3700
-GH1-TCH-14mm-4	14	0.098	2.5	1/4	1.50	38	0.62	15.8	3560
-GH1-TCH-14mm-6	14	0.098	2.5	3/8	1.57	40	0.69	17.4	3560
-GH1-TCH-16mm-6	16	0.118	3.0	3/8	1.69	43	0.69	17.4	3650
-GH1-TCH-16mm-8	16	0.118	3.0	1/2	1.81	46	0.87	22.2	3650
-GH1-TCH-20mm-6	20	0.157	4.0	3/8	1.85	47	0.87	22.2	3650
-GH1-TCH-20mm-8	20	0.157	4.0	1/2	1.97	50	0.87	22.2	3650

● -GH7-TCH 型对焊内螺纹直通 BW Female Straight Fitting

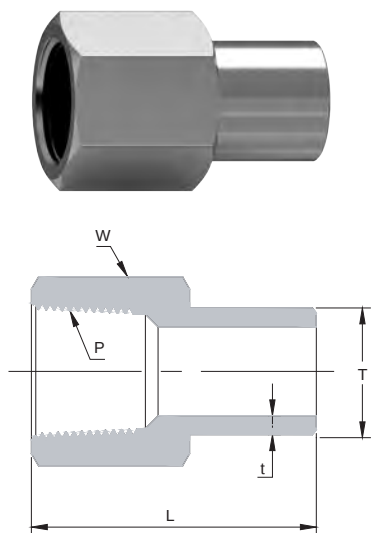


基本订货号 Order information	T in/mm	t		p (NPT)	L		W		压力 等级 PSI
		英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH7-TCH-6-2	3/8	0.049	1.2	1/8	1.02	26	0.56	14.2	2600
-GH7-TCH-8-2	1/2	0.065	1.7	1/8	1.14	29	0.56	14.2	2600
-GH7-TCH-10-2	5/8	0.083	2.1	1/8	1.26	32	0.69	17.4	2100
-GH7-TCH-10-4	5/8	0.083	2.1	1/4	1.34	34	0.75	19.0	2100
-GH7-TCH-12-4	3/4	0.095	2.4	1/4	1.57	40	0.87	22.2	2000
-GH7-TCH-12-6	3/4	0.095	2.4	3/8	1.69	43	0.87	22.2	2000
-GH7-TCH-16-6	1	0.109	2.8	3/8	1.89	48	1.06	27.0	1800
-GH7-TCH-16-8	1	0.109	2.8	1/2	2.09	53	1.06	27.0	1800
-GH7-TCH-8mm-2	8	0.079	2.0	1/8	1.02	26	0.56	14.2	3000
-GH7-TCH-10mm-2	10	0.079	2.0	1/8	1.10	28	0.56	14.2	3000
-GH7-TCH-12mm-4	12	0.094	2.4	1/4	1.26	32	0.69	17.4	3200
-GH7-TCH-14mm-4	14	0.098	2.5	1/4	1.42	36	0.69	17.4	3200
-GH7-TCH-16mm-6	16	0.118	3.0	3/8	1.57	40	0.87	22.2	3000
-GH7-TCH-18mm-6	18	0.118	3.0	3/8	1.69	43	0.87	22.2	3000
-GH7-TCH-20mm-6	20	0.157	4.0	3/8	1.89	48	0.87	22.2	2500
-GH7-TCH-22mm-8	22	0.157	4.0	1/2	1.97	50	1.06	27.0	2500
-GH7-TCH-25mm-8	25	0.177	4.5	1/2	2.09	53	1.06	27.0	2500

● -GHG3-TCH 型对焊高压三通 BW High-pressure Tee




基本订货号 Order information	P		d		L1		L		W		压力等级 PSI
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GHT-TCH-14mm	0.55	14	0.24	6	0.87	22	1.73	44	0.75	19	6000
-GHT-TCH-16mm	0.63	16	0.31	8	0.98	25	1.97	50	0.87	22	6000
-GHT-TCH-18mm	0.71	18	0.39	10	1.06	27	2.13	54	1.02	26	6000
-GHT-TCH-20mm	0.79	20	0.47	12	1.14	29	2.28	58	1.10	28	6000
-GHT-TCH-22mm	0.87	22	0.55	14	1.18	30	2.36	60	1.26	32	6000
-GHT-TCH-25mm	0.98	25	0.63	16	1.34	34	2.68	68	1.42	36	6000
-GHT-TCH-28mm	1.10	28	0.71	18	1.46	37	2.91	74	1.57	40	6000

● -GH-WDT 型对焊接管台 BW pommel




基本订货号 Order information	DN (in)	d		P		L		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH-WDT-8	1/2	0.55	14	0.84	21.3	1.00	25.5	3000
-GH-WDT-12	3/4	0.75	19	1.05	26.7	1.06	27.0	3000
-GH-WDT-16	1	0.98	25	1.31	33.4	1.32	33.5	3000
-GH-WDT-24	1 1/2	1.54	39	1.90	48.3	1.38	35.0	3000
-GH-WDT-8X	1/2	0.47	12	0.84	21.3	1.26	32.0	6000
-GH-WDT-12X	3/4	0.63	16	1.05	26.7	1.44	36.5	6000
-GH-WDT-16X	1	0.87	22	1.31	33.4	1.57	40.0	6000
-GH-WDT-24X	1 1/2	1.38	35	1.90	48.3	1.69	43.0	6000

● -GH-TDT 型对焊内螺纹接管台 BW Remale pommel



基本订货号 Order information	DN (in)	d		P (Rc, NPT)	D		L		压力等级 PSI
		英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH-TDT-8	1/2	0.59	15	1/2	1.14	29	1.00	25.5	3000
-GH-TDT-12	3/4	0.81	20.5	3/4	1.38	35	1.06	27.0	3000
-GH-TDT-16	1	1.04	26.5	1	1.77	45	1.32	33.5	3000
-GH-TDT-24	1 1/2	1.59	40.5	1 1/2	2.52	64	1.38	35.0	3000
-GH-TDT-8X	1/2	0.47	12	1/2	1.50	38.1	1.26	32.0	6000
-GH-TDT-12X	3/4	0.63	16	3/4	1.75	44.5	1.44	36.5	6000
-GH-TDT-16X	1	0.83	21	1	2.25	57.1	1.57	40.0	6000
-GH-TDT-24X	1 1/2	1.34	34	1 1/2	3.00	76.2	1.69	43.0	6000

● -GH-SKT 型承插焊接管台 SW pommel



基本订货号 Order information	DN (in)	d		P		D		L		压力等级 PSI
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	
-GH-SKT-8	1/2	0.59	15	0.85	21.7	1.19	30.2	1.00	25.5	3000
-GH-SKT-12	3/4	0.81	20.5	1.07	27.1	1.41	35.9	1.06	27.0	3000
-GH-SKT-16	1	1.04	26.5	1.33	33.8	1.73	44.0	1.32	33.5	3000
-GH-SKT-24	1 1/2	1.59	40.5	1.92	48.7	2.36	60.0	1.38	35.0	3000
-GH-SKT-8X	1/2	0.47	12	0.85	21.7	1.28	32.4	1.26	32.0	6000
-GH-SKT-12X	3/4	0.63	16	1.07	27.1	1.55	39.3	1.44	36.5	6000
-GH-SKT-16X	1	0.83	21	1.33	33.8	1.88	47.8	1.57	40.0	6000
-GH-SKT-24X	1 1/2	1.34	34	1.92	48.7	2.54	64.5	1.69	43.0	6000

SINYA

港商 扬中新亚自控工程有限公司
独资

YANGZHONG SINYA AUTO-CONTROL ENGINEERING CO., LTD.

地址：江苏省扬中经济开发区兴隆港北路

Add: Xinglong Port, Yangzhong, Zhenjiang, Jiangsu, China

电话(Tel): 0511-88783806

传真(Fax): 0511-88451691

网址(Http): www.deflok.com

邮箱(E-mail): sales@deflok.com